REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE

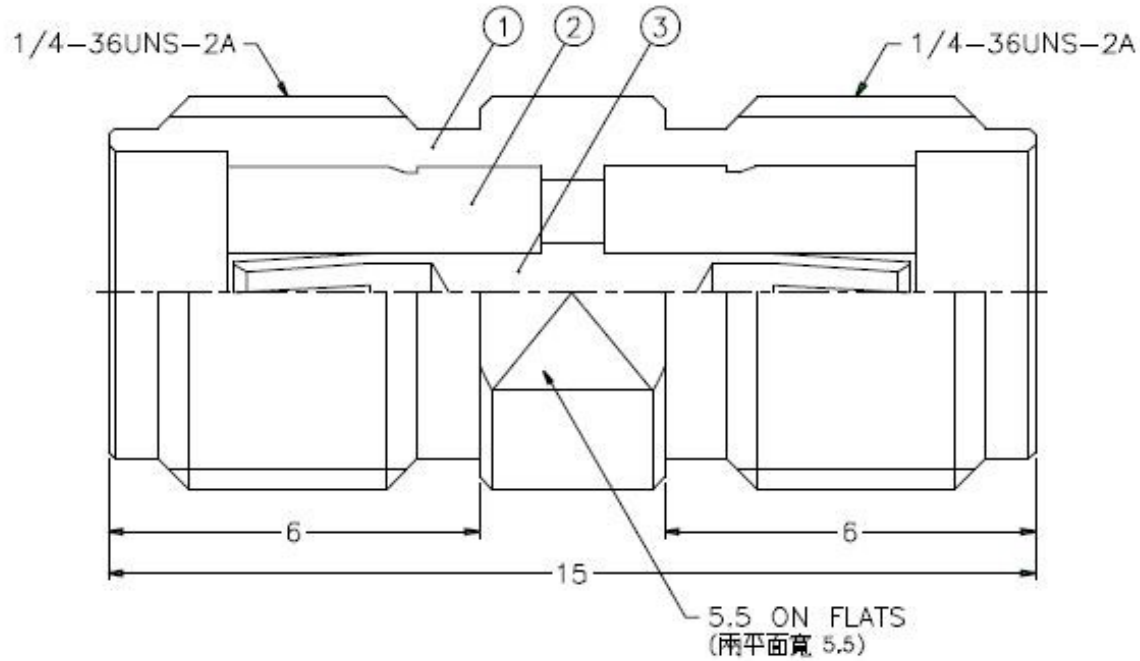

NOTES: FINISH (PLATING THICKNESS IN MICRO–INCHES)
1. BRASS PER QQ–B–626
2. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
3. BERYLLIUM COPPER PER QQ–C–530
4. GOLD PL. 50 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
5. PTFE MIL–P–19468

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
3	CONTACT PIN	NOTE 3	NOTE 4	1	SMA7071A2–3–A
2	INSULATOR	NOTE 5	NATURAL	2	SMA7071A2–2T–50–B
1	BODY	NOTE 1	NOTE 2	1	SMA7071A2–1–C

DIMENSIONS ARE IN MILLIMETERS

UNLESS OTHERWISE SPECIFIED TOLERANCES

0.5–6	±0.2
6–30	±0.4
30–120	±0.6
120–315	±1
315–1000	±1.6
1000–2000	±2.4

SCALE 8/1 ISSUE A

PART NO.

APPROVED	DATE	05–19–99'
CHECKED	DATE	05–19–99'
DRAWN	DATE	05–19–99'

Amphenol – Kai Jack
TAINAN TAIWAN

TITLE
SMA FEMALE TO FEMALE ADAPTOR

DRAWING NO.
KJ–SMA7071A2–3GT50G–50

FILE NO. F:\DWG\SMA\7071A2\50\3GT50G