

TITLE
INDUCTOR 6 mH
POTS LOW PASS FILTER

SCHOTT CORPORATION
 1000 PARKERS LAKE ROAD
 WAYZATA, MN 55391
 (952) 475-1173



AGENCY APPROVAL:
NA

PART NUMBER
32421
 REV 5 PAGE 1 END

SPECIFICATIONS

TEMP CLASS 130°C

1. INDUCTANCE: @ 0.1 Vrms, 10 kHz, 0-100 mAdc
 @ 0 mAdc = 1-5 = 5.64 to 6.36 mH
 @ 100 mAdc 1-5-6-10 = 17.8 mH MIN
 1-5 = 6-10 within 4 %
2. IWC: @ 100 kHz, 0.1 Vrms
 1-6 = 20 pF MAX
3. TURNS RATIO: 1-5 : 6-10 = 1 : 1 ± 2%
4. DC RESISTANCE: OHMS
 1-5 = 6-10 = 5.0 MAX
5. DIELECTRIC STRENGTH: 850 Vdc, 1 minute
 (1000 VDC, 1 second Schott Production Test)
 1-6 AND ALL WINDINGS TO CORE

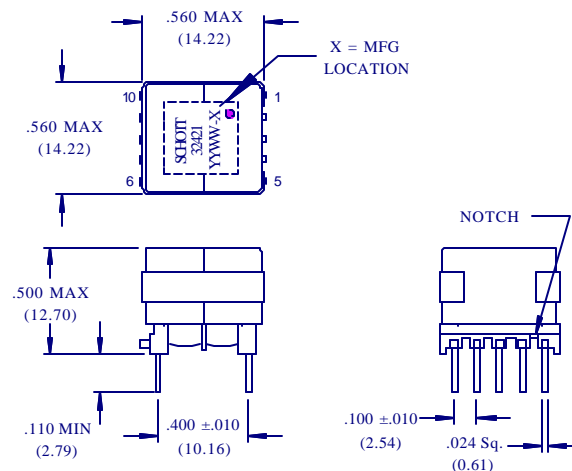

inches
 (mm)

TOLERANCES UNLESS OTHERWISE NOTED	2 PLACE	3 PLACE	ANGLE
	+ .02	+ -.010	+ °