



FEATURES

- RAILWAY APPLICATION
- 20 WATTS MAXIMUM OUTPUT POWER
- ULTRA LOW QUIESCENT CURRENT
- SINGLE OUTPUT UP TO 4.5A
- STANDARD 2.00 X 1.00 X 0.40 INCH
- HIGH EFFICIENCY UP TO 89%
- 4:1 ULTRA WIDE INPUT VOLTAGE RANGE
- SIX-SIDED CONTINUOUS SHIELD
- FIXED SWITCHING FREQUENCY
- CE MARK MEETS 2006/95/EC, 2011/95/EC AND 2004/108/EC
- SAFETY MEETS UL60950-1, EN60950-1, IEC60950-1 AND EN50155
- COMPLIANT TO RoHS EU DIRECTIVE 2011/65/EU

OPTIONS

Positive logic Remote On/Off, Without trim pin, Without On/Off control pin

DESCRIPTION

RED20W DC/DC converters provide up to 20 watts of output power in an industry standard package and footprint. RED20W series have 4:1 ultra wide input voltage of 9~36, 18~75 and 43~160VDC. The RED20W have features 1600VDC of isolation, short circuit protection, over-current protection, over-voltage protection and six sided shielding.

TECHNICAL SPECIFICATION

All specifications are typical at nominal input, full load and 25°C otherwise noted

OUTPUT SPECIFICATIONS			INPUT SPECIFICATIONS		
Output power	20 Watts		24VDC nominal input	9 ~ 36VDC	
Voltage accuracy	± 1%		48VDC nominal input	18 ~ 75VDC	
Minimum load	0%		110VDC nominal input	43 ~ 160VDC	
Voltage adjustability (Note 5)	Single	±10%	Input filter	24VDC, 48VDC input 110VDC input	Common Chock Pi Filter
Line regulation	LL to HL at Full Load	Single ± 0.2% Dual ± 0.5%	Input surge voltage	24VDC input 48VDC input 110VDC input	50VDC 1sec, max. 100VDC 1sec, max. 170VDC 1sec, max.
Load regulation	No Load to Full Load	Single ± 0.2% Dual ± 1.0%	Input reflected ripple current	Nominal input and full load	30mA p-p
	10% Load to 90% Load	Single ± 0.1% Dual ± 0.8%	Start up time	Nominal input and constant resistive load	Power up 30ms, max. Remote ON/OFF 30ms, max.
Cross regulation	Asymmetrical load 25% / 100% FL	Dual ± 5%	Start-up voltage	24VDC input 48VDC input 110VDC input	9VDC, max. 18VDC, max. 43VDC, max.
Ripple and noise	20MHz bandwidth (Measured with a 1µF/50V X7R MLCC)	See table	Shutdown voltage	24VDC input 48VDC input 110VDC input	8VDC 16VDC 40VDC
Temperature coefficient		±0.02% / °C, max.	Remote ON/OFF (Note 6)	Positive logic(Option) Negative logic(Standard)	Open or 3 V < Vr < 15V Short or 0V < Vr < 1.2V Short or 0V < Vr < 1.2V Open or 3V < Vr < 15V
Transient response recovery time	25% load step change	250µs	Input current of Remote control pin	Nominal input	-0.5mA~1.0mA
Over voltage protection	3.3VDC output 5VDC output 12VDC output 15VDC output	3.7VDC~5.4VDC 5.6VDC~7.0VDC 13.5VDC~19.6VDC 16.8VDC~20.5VDC	Remote off state input current	Nominal input	2.5mA
Over load protection	% of FL at nominal input	150%	ENVIRONMENTAL SPECIFICATIONS		
Short circuit protection	Continuous, automatics recovery		Operating ambient temperature (Note 7)	-40°C ~ +101°C (with derating)	
GENERAL SPECIFICATIONS			Maximum case temperature	+105°C	
Efficiency	See table		Storage temperature range	-55°C ~ +125°C	
Isolation voltage	Input to Output Input(Output) to Case	1600VDC, min. 1minute 1000VDC, min. 1minute	Thermal impedance (Note 8)	Natural convection Natural convection with heat-sink	12°C/Watt 10°C/Watt
Isolation resistance	500VDC	10 ⁹ ohms, min.	Thermal shock	MIL-STD-810F	
Isolation capacitance	3000pF, max.		Shock	EN61373, MIL-STD-810F	
Switching frequency	330kHz±10%		Vibration	EN61373, MIL-STD-810F	
Design meet safety standard	IEC60950-1, UL60950-1, EN60950-1, EN50155		Relative humidity	5% to 95% RH	
Case material	Nickel-coated copper		EMC CHARACTERISTICS		
Base material	FR4 PCB		EMI (Note 9)	EN55022, EN55011	
Potting material	Silicone (UL94 V-0)		ESD	Air ± 8kV Contact ± 6kV	Class A, Class B Perf. Criteria A
Dimensions	2.00 X 1.00 X 0.40 Inch (50.8X 25.4 X 10.2 mm)		Radiated immunity	EN61000-4-3	20 V/m Perf. Criteria A
Weight	30g(1.06oz)		Fast transient (Note 10)	EN61000-4-4	± 2kV Perf. Criteria A
MTBF (Note 1)	MIL-HDBK-217F		Surge (Note 10)	EN61000-4-5	± 2kV Perf. Criteria A
	1.523x10 ⁶ hrs		Conducted immunity	EN61000-4-6	10 Vr.m.s Perf. Criteria A


Model Number	Input Range	Output Voltage	Output Current		Output ⁽³⁾ Ripple & Noise	No Load ⁽²⁾ Input Current	Eff ⁽³⁾ (%)	Capacitor ⁽⁴⁾ Load max
			Min. Load	Full Load				
RED20-24S3P3W	9 ~ 36 VDC	3.3 VDC	0mA	4500mA	75mVp-p	6mA	85	7000µF
RED20-24S05W	9 ~ 36 VDC	5 VDC	0mA	4000mA	75mVp-p	6mA	88	5000µF
RED20-24S12W	9 ~ 36 VDC	12 VDC	0mA	1670mA	100mVp-p	6mA	89	850µF
RED20-24S15W	9 ~ 36 VDC	15 VDC	0mA	1330mA	100mVp-p	6mA	88	700µF
RED20-24D12W	9 ~ 36 VDC	± 12 VDC	0mA	± 833mA	100mVp-p	6mA	88	± 500µF
RED20-24D15W	9 ~ 36 VDC	± 15 VDC	0mA	± 667mA	100mVp-p	6mA	89	± 350µF
RED20-48S3P3W	18 ~ 75 VDC	3.3 VDC	0mA	4500mA	75mVp-p	4mA	85	7000µF
RED20-48S05W	18 ~ 75 VDC	5 VDC	0mA	4000mA	75mVp-p	4mA	88	5000µF
RED20-48S12W	18 ~ 75 VDC	12 VDC	0mA	1670mA	100mVp-p	4mA	89	850µF
RED20-48S15W	18 ~ 75 VDC	15 VDC	0mA	1330mA	100mVp-p	4mA	89	700µF
RED20-48D12W	18 ~ 75 VDC	± 12 VDC	0mA	± 833mA	100mVp-p	4mA	88	± 500µF
RED20-48D15W	18 ~ 75 VDC	± 15 VDC	0mA	± 667mA	100mVp-p	4mA	89	± 350µF
RED20-110S3P3W	43 ~ 160 VDC	3.3 VDC	0mA	4500mA	75mVp-p	3mA	85	7000µF
RED20-110S05W	43 ~ 160 VDC	5 VDC	0mA	4000mA	75mVp-p	3mA	87	5000µF
RED20-110S12W	43 ~ 160 VDC	12 VDC	0mA	1670mA	100mVp-p	3mA	88	850µF
RED20-110S15W	43 ~ 160 VDC	15 VDC	0mA	1330mA	100mVp-p	3mA	88	700µF
RED20-110D12W	43 ~ 160 VDC	± 12 VDC	0mA	± 833mA	100mVp-p	3mA	88	± 500µF
RED20-110D15W	43 ~ 160 VDC	± 15 VDC	0mA	± 667mA	100mVp-p	3mA	89	± 350µF

Note


1. MIL-HDBK-217F @Ta=25 °C, Full load.
2. Typical value at nominal input and no load.
3. Typical value at nominal input and full load.
4. Test by minimum input and constant resistive load.
5. Trimming allows the user to increase or decrease the output voltage set point of the module. This is accomplished by connecting an external resistor between the TRIM pin and either the +OUTPUT pin or the -OUTPUT pin.
6. The CTRL pin voltage is reference to -INPUT.
- The order number please see product standard table.
7. Operating ambient temperature:
Converter can meet the railway T2 and TX temperature requirement.
T2: -40°C ~ +70°C as all models , TX: -40°C ~ +85°C as power derating to 55% output power.(with Heat-sink as power derating to 70% output power)
Test condition with vertical direction by natural convection (20LFM).
8. Heat-sink is optional and P/N: 7G-0020C-F
9. The RED20W series 24VDC & 48VDC input standard module meet EN55022 & EN55011 Class B without external components, 110VDC input meet EN55022 Class A without external components and meet Class B with external components. For more detail information, please contact with P-DUKE.
10. An external input filter capacitor is required if the module has to meet EN61000-4-4, EN61000-4-5.
The filter capacitor Power Mate suggest: 24VDC & 48VDC input: Nippontech KY series, 220µF/100V.
110VDC input: Rubycon BXF series, 100µF/250V.



CAUTION: This power module is not internally fused. An input line fuse must always be used.

RED20-48S05W Derating Curve

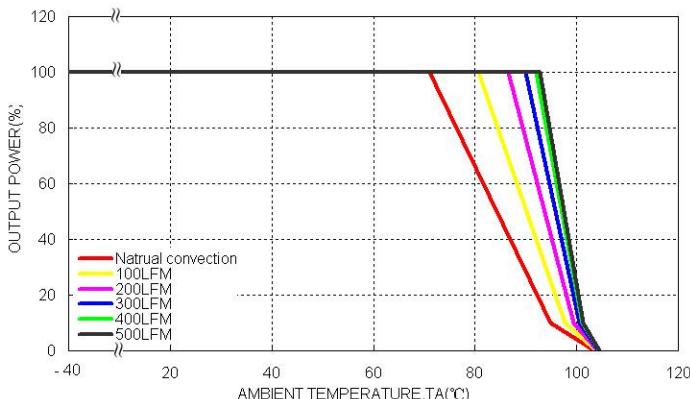


RED20-48S05W Derating Curve With Heat-sink (Note 8)

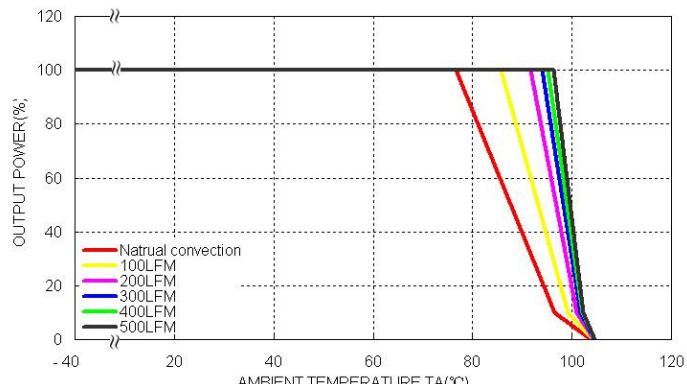

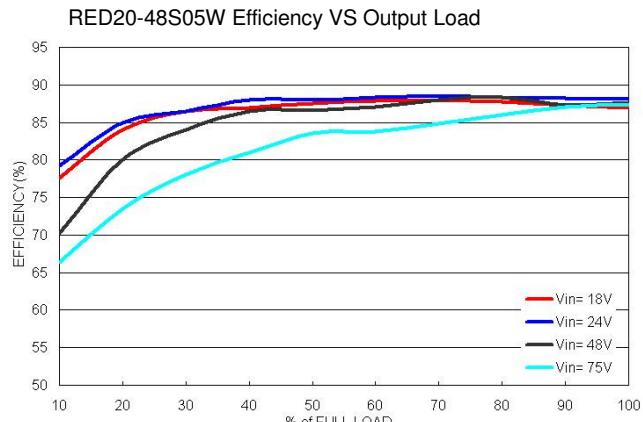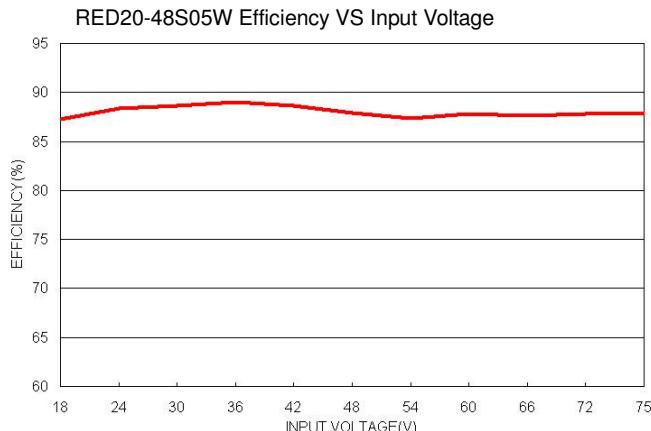


MECHANICAL DRAWING :

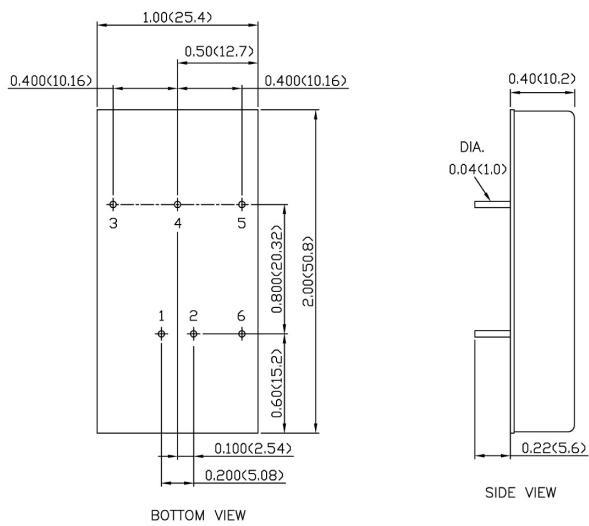

- All dimensions in Inch (mm)
- Tolerance: $X.XX \pm 0.02$ ($X.X \pm 0.5$)
 $X.XXX \pm 0.01$ ($X.XX \pm 0.25$)
- Pin pitch tolerance ± 0.01 (0.25)
- Pin dimension tolerance ± 0.004 (0.1)

PIN CONNECTION		
PIN	SINGLE	DUAL
1	+ INPUT	+ INPUT
2	- INPUT	- INPUT
3	+ OUTPUT	+ OUTPUT
4	TRIM	COMMON
5	- OUTPUT	- OUTPUT
6	CTRL	CTRL

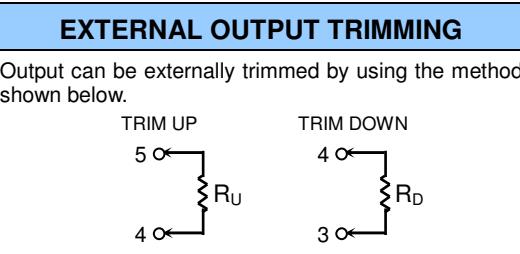

PRODUCT STANDARD TABLE

Option	Suffix
Negative logic remote ON/OFF(Standard)	
Positive logic remote ON/OFF	-A
Without ON/OFF logic pin	-B
Negative remote logic ON/OFF without TRIM pin	-C
Without ON/OFF logic & TRIM pin	-D
Positive remote logic ON/OFF without TRIM pin	-E