

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [36643-0004](#)
Status: **Active**
Overview: [MLX™ Power Connectors](#)
Description: 2.13mm Diameter MLX™ Plug Housing, 4 Circuit, PA Polyamide Nylon 6/6 94V-2, Glow Wire Compatible

Documents:

[3D Model](#) [RoHS Certificate of Compliance \(PDF\)](#)
[Drawing \(PDF\)](#)

Agency Certification


CSA LR19980
 UL E29179

General

Product Family Crimp Housings
 Series [36643](#)
 Application Power, Wire-to-Wire
 Comments This Molex product is manufactured from material that has the following ratings, tested by independent agencies :. a) A Glow Wire Ignition Temperature (GWIT) of at least 775 deg C per IEC 60695-2-13.. b) A Glow Wire Flammability Index (GWFI) above 850 deg C per IEC 60695-2-12.and hence complies with the requirements set out in the International Standard IEC 60335-1 5th edition - household and similar electrical appliances - safety; section 30 Resistance to heat and fire.<P><P>The customers using this product must determine its suitability for use in their particular application through testing or other acceptable means as described in end-product glow-wire flammability test standard IEC 60695-2-11 and any applicable product end-use standard(s).<P>If it is determined during the customer's evaluation of suitability, that higher performance is required, please contact Molex for possible product options.
[MLX™ Power Connectors](#)
 Overview [MLX™](#)
 Product Name [MLX™](#)
 UPC 800756934181

Physical

Circuits (maximum) 4
 Circuits Detail 4
 Color - Resin Natural
 Flammability 94V-2
 Gender Plug
 Glow-Wire Compliant Yes
 Keying to Mating Part None
 Lock to Mating Part Yes
 Material - Resin Nylon
 Net Weight 3.530/g
 Number of Rows 1
 Packaging Type Bag
 Panel Mount No
 Pitch - Mating Interface 6.35mm
 Polarized to Mating Part Yes

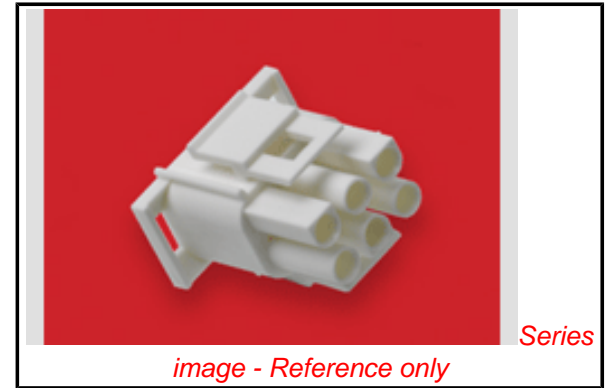

EU RoHS

ELV and RoHS Compliant
REACH SVHC Contains SVHC: No
Low-Halogen Status Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

[36643Series](#)

Mates With

42022 Diameter MLX™ Pin and Socket Receptacle

Use With

MLX™ Crimp Terminal [42023](#) , [42024](#)

Stackable	No
Temperature Range - Operating	-55°C to +105°C

Electrical

Current - Maximum per Contact	20A
-------------------------------	-----

Material Info

Reference - Drawing Numbers

Sales Drawing	SD-36643-009
---------------	--------------

This document was generated on 10/08/2014

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION