

ASA 6W-M Series

6 Watts

Data Sheet

Total Power: 6 Watts
Input Voltage: 12 V, 24 V or 48 V
of Outputs: Single, Dual

SPECIAL FEATURES

- 4000 Vac reinforced insulation
- Medical safety to UL/cUL/EN/IEC 60601-1 3rd Edition
- 2 MOOP rated
- Wide 2:1 input voltage range
- Fully regulated output voltage
- Low leakage current
- Operating temperature range -40 °C to +75 °C (with derating)
- Input filter meets EN 55022, class A and FCC, level A
- Overload protection
- 1.25" x 0.8" package
- RoHS compliant
- Three-year product warranty

SAFETY

- cUL/UL60950-1, CSA C22.2 No. 60950-1-03
- UL60601-1, CSA C22.2 No.601-1
- IEC/EN 60950-1, IEC/EN 60601-1 3rd Edition, 2 MOOP
- cUL/UL60950-1 certificate
- UL60601-1 UL certificate



Electrical Specifications

Input	
Input range	9 - 18 Vdc; 18 - 36 Vdc; 36 - 75 Vdc
Efficiency	80%
Output	
Voltage tolerance	±1.0%
Line regulation	±0.5%
Load regulation	1.0%
Noise/ripple	180 mV
OCP and S/C protection	Foldback, auto-cover
Switching frequency	150 KHz
Temperature coefficient	±0.05 /°C
Isolation	
I/O isolation	4000 Vac rms
Insulation resistance	10 Gohm
Insulation capacitance	13 pF

Environmental Specifications


Operating ambient temperature range	-40 °C to +75 °C
Storage temperature	-50 °C to +125 °C
Humidity	5% to 95% (non-condensing)
MTBF	1,000,000 hours

Ordering Information

Model Number	Input Voltage	Output 1 Voltage	Output 2 Voltage	Maximum Power
ASA01A12-M	9 - 18 V	5 V @ 1 A		5 W
ASA01B12-M	9 - 18 V	12 V @ 0.5 A		6 W
ASA01BB12-M	9 - 18 V	12 V @ 0.25 A	-12 V @ 0.25 A	6 W
ASA01CC12-M	9 - 18 V	15 V @ 0.2 A	-15 V @ 0.2 A	6 W
ASA01A24-M	18 - 36 V	5 V @ 1 A		5 W
ASA01B24-M	18 - 36 V	12 V @ 0.5 A		6 W
ASA01BB24-M	18 - 36 V	12 V @ 0.25 A	-12 V @ 0.25 A	6 W
ASA01CC24-M	18 - 36 V	15 V @ 0.2 A	-15 V @ 0.2 A	6 W
ASA01A48-M	36 - 75 V	5 V @ 1 A		5 W
ASA01B48-M	36 - 75 V	12 V @ 0.5 A		6 W
ASA01BB48-M	36 - 75 V	12 V @ 0.25 A	-12 V @ 0.25 A	6 W
ASA01CC48-M	36 - 75V	15 V @ 0.2 A	-15 V @ 0.2 A	6 W

Please contact Artesyn Embedded Technologies for information on other output voltages, power ranges and configurations.

Mechanical Drawing

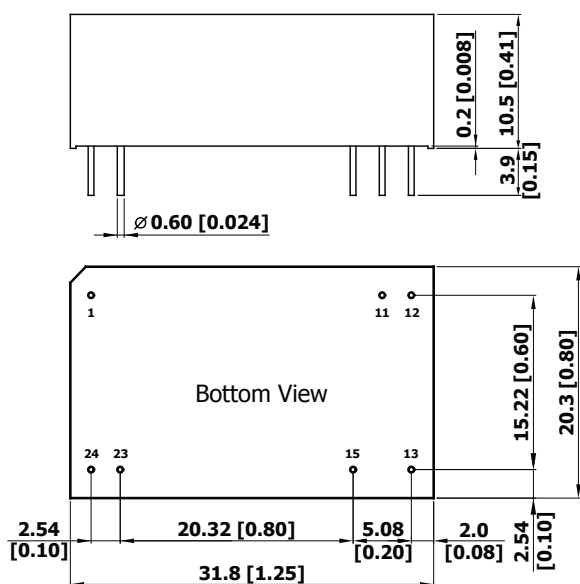

All dimensions in mm (inches)
 Tolerance: X.X±0.25 (X.XX±0.01)
 X.XX±0.13 (X.XXX±0.005)
 Pin pitch tolerance: ±0.25 (±0.01)
 Pin dimension tolerance: ±0.1 (±0.004)

Physical Characteristics

Case Size	31.8 x 20.3 x 12 mm (1.25 x 0.8 x 0.47 inches)
Case Material	Non-Conductive Black Plastic (flammability to UL 94V-0 rated)
Weight	18 g

Pin Connectors

Pin Number	Single Output	Dual Output
1	+Vin	+Vin
11	No Pin	Common
12	-Vout	No Pin
13	+Vout	-Vout
15	No Pin	+Vout
23	-Vin	-Vin
24	-Vin	-Vin

WORLDWIDE OFFICES

Americas

2900 S.Diablo Way
 Tempe, AZ 85282
 USA
 +1 888 412 7832

Europe (UK)

Waterfront Business Park
 Merry Hill, Dudley
 West Midlands, DY5 1LX
 United Kingdom
 +44 (0) 1384 842 211

Asia (HK)

14/F, Lu Plaza
 2 Wing Yip Street
 Kwun Tong, Kowloon
 Hong Kong
 +852 2176 3333

ARTESYN
 EMBEDDED TECHNOLOGIES

www.artesyn.com

Artesyn Embedded Technologies, Artesyn and the Artesyn Embedded Technologies logo are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. © 2016 Artesyn Embedded Technologies, Inc. All rights reserved. For full legal terms and conditions, please visit www.artesyn.com/legal.

For more information: www.artesyn.com/power
 For support: productsupport.ep@artesyn.com