

# C2012CH2E103J125AA

TDK Item Description : C2012CH2E103JT\*\*\*\*



## Application & Main Feature

Commercial Grade ( Mid Voltage (100 to 630V) )

## Series

C2012 [EIA CC0805]



## Dimensions

L 2.00mm +/-0.2mm  
W 1.25mm +/-0.2mm  
T 1.25mm +/-0.2mm  
B 0.20mm Min.  
G

## Temperature Characteristic

CH (-25 to 85 degC 0+/-60ppm/degC)

## Rated Voltage

2E (250Vdc)

## Capacitance

10nF

## Capacitance Tolerance

J (+/-5%)

## Q Factor

1000 Min.


## Insulation Resistance

10Gohm Min.


## AEC-Q200

Not Applicable


### |Z|, ESR vs. Freq. Characteristics

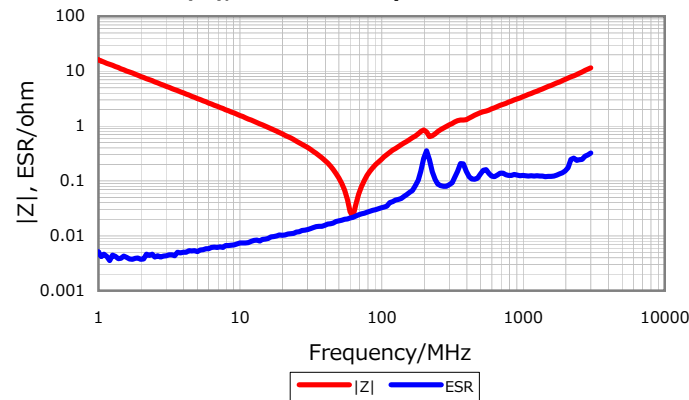

### DC Bias Characteristic

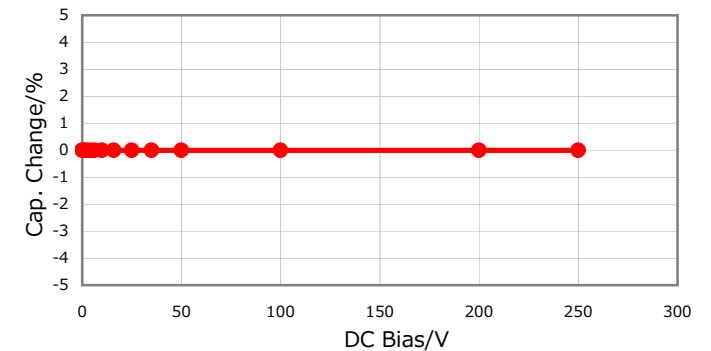

### Cap. vs. Freq. Characteristic

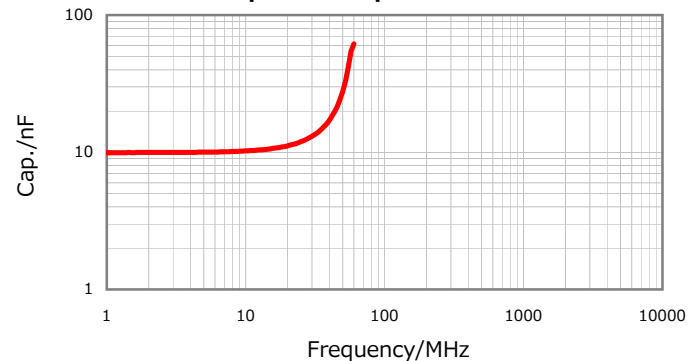

### Temperature Characteristics



Characterization Sheet ( Multilayer Ceramic Chip Capacitors )



⚠ All specifications are subject to change without notice.

January 3, 2016