

TOSHIBA SCHOTTKY BARRIER RECTIFIER SCHOTTKY BARRIER TYPE

CRS03


SWITCHING TYPE POWER SUPPLY APPLICATIONS

PORTABLE EQUIPMENT BATTERY APPLICATIONS

- Low Forward Voltage : $V_{FM} = 0.45 \text{ V (Max.)}$
- Average Forward Current : $I_{F(AV)} = 1.0 \text{ A}$
- Repetitive Peak Reverse Voltage : $V_{RRM} = 30 \text{ V}$

MAXIMUM RATINGS

| CHARACTERISTIC | SYMBOL | RATING | UNIT |
|---|-------------|------------|------|
| Repetitive Peak Reverse Voltage | V_{RRM} | 30 | V |
| Average Forward Current | $I_{F(AV)}$ | 1.0 | A |
| Peak One Cycle Surge Forward Current (Non-Repetitive) | I_{FSM} | 20 (50 Hz) | A |
| Junction Temperature | T_j | -40~125 | °C |
| Storage Temperature Range | T_{stg} | -40~125 | °C |

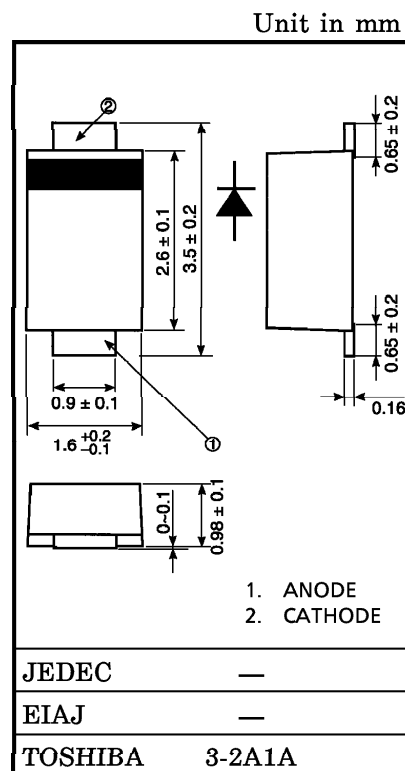

Weight : 0.013 g


ELECTRICAL CHARACTERISTICS (Ta = 25°C)

| CHARACTERISTIC | SYMBOL | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|---------------------------------|---------------|---|------|-------|------|---------------|
| Peak Forward Voltage | $V_{FM(1)}$ | $I_{FM} = 0.1 \text{ A}$ | — | 0.35 | — | V |
| | $V_{FM(2)}$ | $I_{FM} = 0.7 \text{ A}$ | — | 0.425 | 0.45 | V |
| | $V_{FM(3)}$ | $I_{FM} = 1.0 \text{ A}$ | — | 0.45 | — | V |
| Repetitive Peak Reverse Current | I_{RRM} | $V_{RRM} = 5 \text{ V}$ | — | 0.5 | — | μA |
| | I_{RRM} | $V_{RRM} = 30 \text{ V}$ | — | — | 100 | μA |
| Junction Capacitance | C_j | $V_R = 10 \text{ V}, f = 1.0 \text{ MHz}$ | — | 40 | — | pF |
| Thermal Resistance | $R_{th(j-a)}$ | On ceramic substrate | — | — | 70 | °C/W |
| | | On glass-epoxy substrate | — | — | 140 | |


961001EAA1

- TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.

MARKING

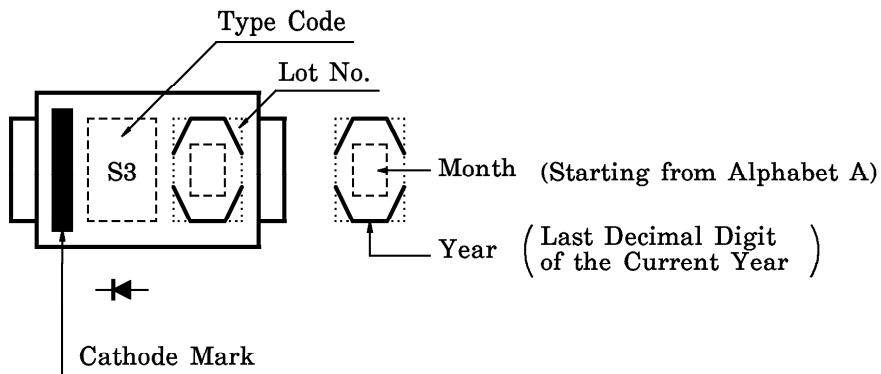








FOLLOWING INDICATES THE DATE OF MANUFACTURE

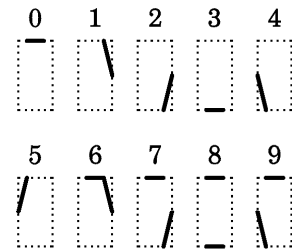


STANDARD SOLDERING PAD

Unit : mm

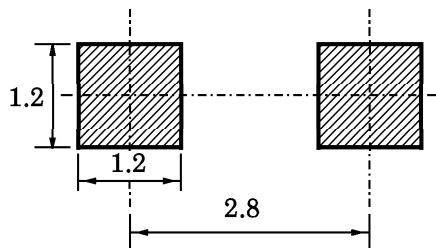

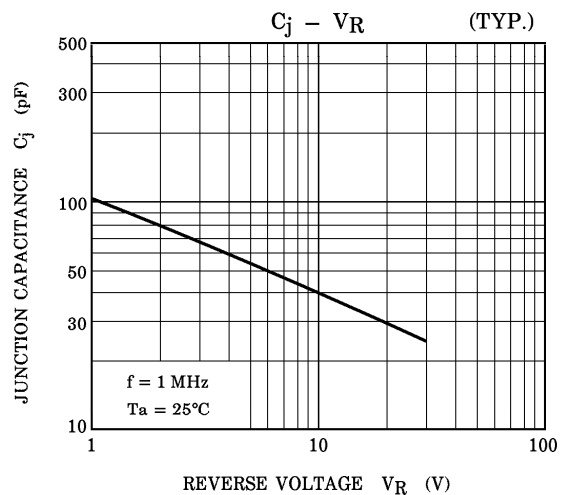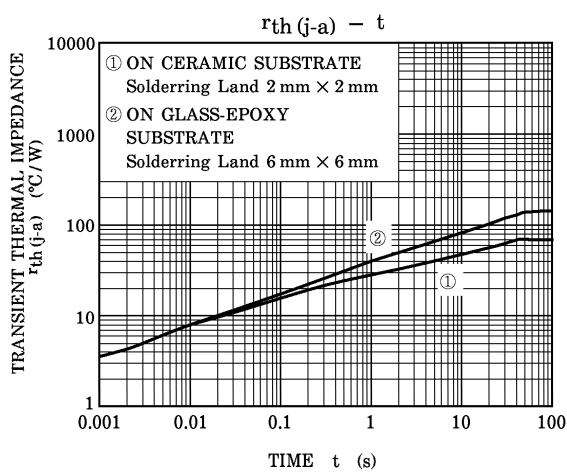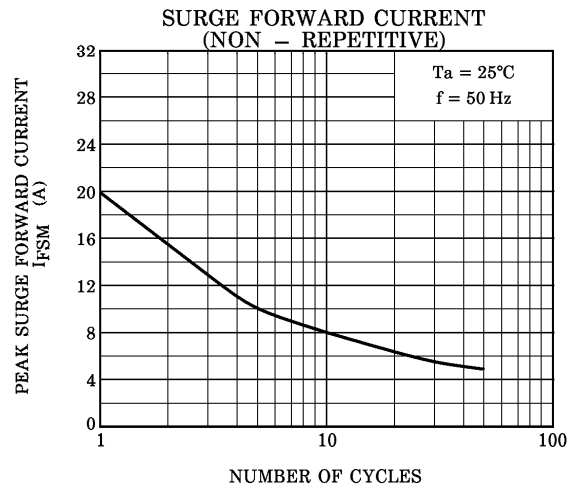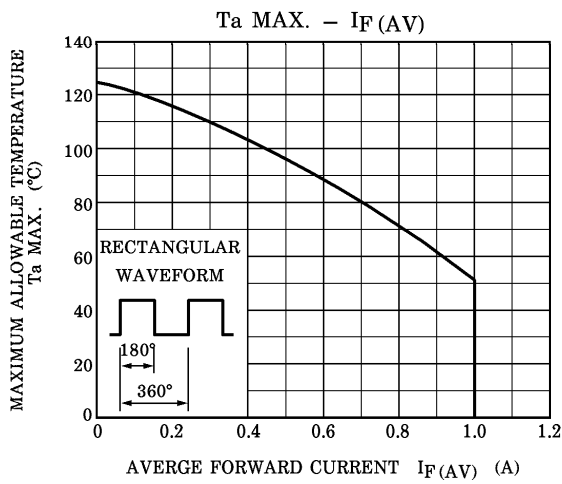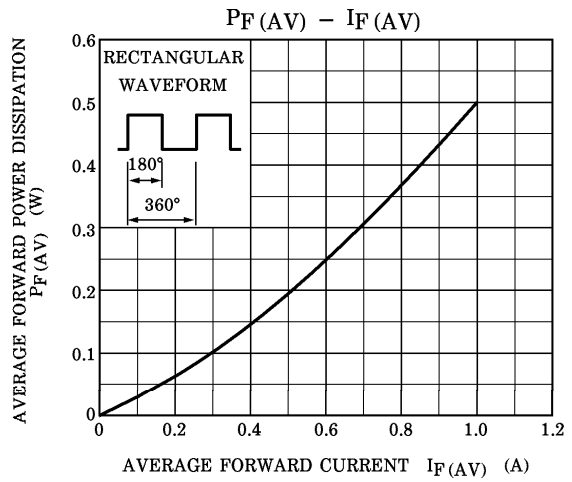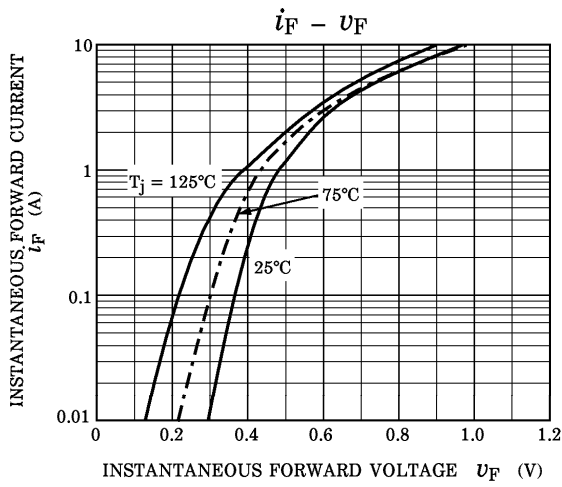

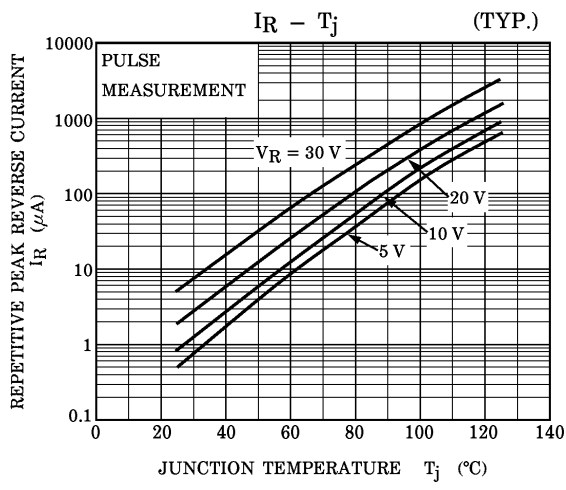

Copyright Each Manufacturing Company.

All Datasheets cannot be modified without permission.

This datasheet has been download from :

www.AllDataSheet.com

100% Free DataSheet Search Site.

Free Download.

No Register.

Fast Search System.

www.AllDataSheet.com