

**APPLIED
CONCEPTS INC.**

397 Route 281 - P.O. BOX 453
Tully, New York 13159-0453
Phone: (315) 696-6676 Fax: (315) 696-9923
www.acipower.com

AC5-12-1073

CCFL INVERTER

(For Multiple Tube Applications)

PRODUCT DATA SHEET

8/7/00

The AC5-12-1073 is designed to power 8 CCFL's to a nominal power level of 22 watts.

Intensity control (0-100%) is accomplished by the user providing a variable dc level of 0V(off) to 5V(full-on) at pin 5 of CON1.

Enable control is accomplished at pin 3 of CON1 (0V=off, 5V=on).

All outputs are open and short circuit protected.

Meets nominal drive & pin-out requirements for Landmark 8 tube backlights - C053G, BK103A, BK106A, LM073A-DC31, C096A.


Specifications:

- Vin = +12V +/- 10%
- CCFL strike voltage = 1200Vrms @ Vin=12V
- CCFL tube current = 7.0mA/tube @ 100% intensity/Vin=12V
- Recommended CCFL sustaining voltage = 300Vrms - 500Vrms
- Nominal tube current frequency = 42kHz +/- 10%
- Nominal pwm frequency = 98Hz +/- 3%
- Pwm duty cycle range = 0 to 100%
- Average electrical efficiency >90%
- External PWM signal input control via enable pin
- Output PWM sync signal @ pin 6 of CON1

Additional control capability:*

- Supports multiple units ie:Master/Slave(s)
- Synchronization to display frame-rate
- Low power sleep-mode and soft-start
- UL 1950 Recognized (File No. E201813)

* Please contact factory for information

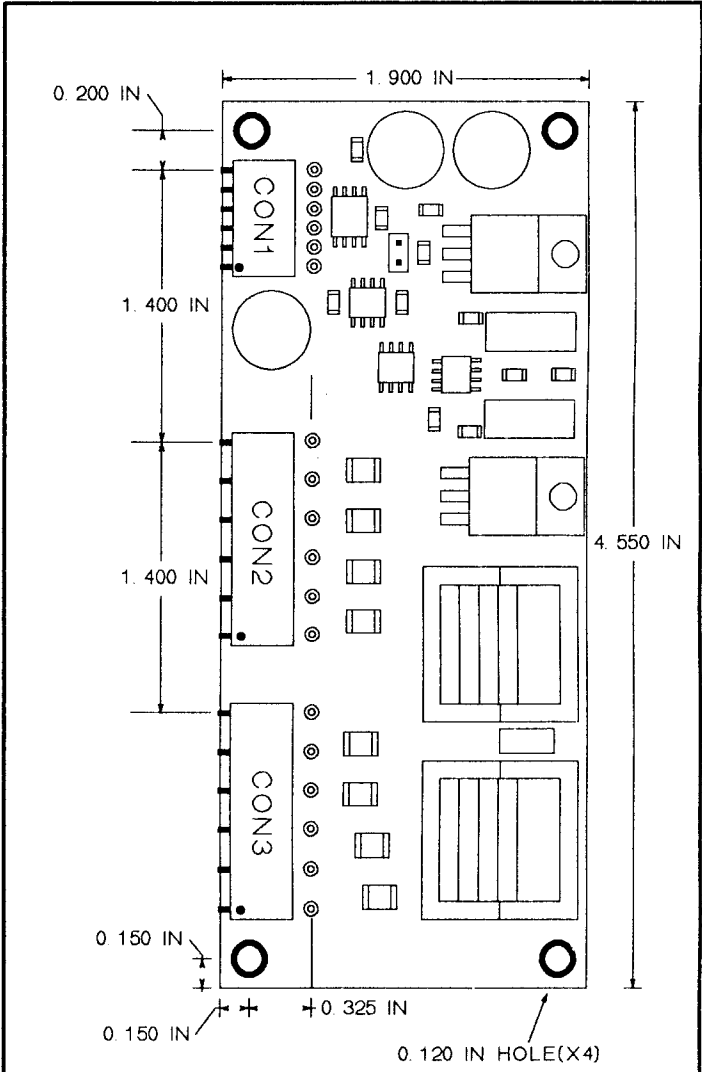

PROFILE = 0.575 IN

CON1
MOLEX 22-28-1063

CON2(CON3)
MOLEX 22-28-1113

PIN #		PIN #	
1	+12V	1	NC
2	GND	2	NC
3	ENABLE	3	CCFL 1(2)
4	LOGIC HI	4	NC
5	VCNTL	5	CCFL 3(4)
6	PWM OUT	6	NC
		7	CCFL 5(6)
		8	NC
		9	CCFL 7(8)
		10	NC
		11	CCFL COMMON