

Schottky Barrier Rectifiers


PRODUCT SUMMARY

1.0 Amp. Surface Mount

FEATURES

- For surface mounted application
- Low-Profile Package
- Ideal for automated pick & place
- Low power loss, high efficiency
- High current capability, low VF
- High surge current capability
- Plastic material used carriers Underwriters
- Laboratory Classification 94V-0
- Epitaxial construction
- High temperature soldering: 260 °C / 10 seconds at terminals

Sub SMA

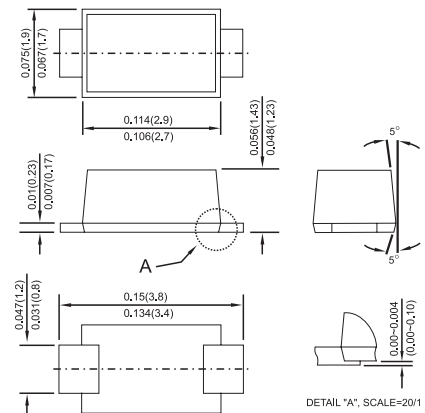

MECHANICAL DATA

- Cases: Sub SMA plastic case
- Terminal : Pure tin plated, lead free.
- Polarity: Color band denotes cathode end
- Packaging: 12mm tape per EIA STD RS-481
- Weight approx. 15mg

Dimensions in inches and (millimeters)

 **Pb-free; RoHS-compliant**

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, de-rate current by 20%

Type Number	Symbol	SS 12L	SS 13L	SS 14L	SS 15L	SS 16L	SS 19L	SS 110L	SS 115L	Units
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	20	30	40	50	60	90	100	150	V
Maximum RMS Voltage	V_{RMS}	14	21	28	35	42	63	70	105	V
Maximum DC Blocking Voltage	V_{DC}	20	30	40	50	60	90	100	150	V
Marking Code (Note 2)		12LYM	13LYM	14LYM	15LYM	16LYM	19LYM	10LYM	A5LYM	
Maximum Average Forward Rectified Current	$I_{(AV)}$	1.0								A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	30								A
Maximum Instantaneous Forward Voltage (Note 1) @ 0.5A @ 1.0A	V_F	0.385 0.45	0.43 0.50	0.51 0.55	0.58 0.70		0.65 0.80		0.75 0.90	V
Maximum DC Reverse Current @ $T_A = 25^\circ\text{C}$ at Rated DC Blocking Voltage @ $T_A = 100^\circ\text{C}$	I_R	0.4					0.05			mA mA
		8.0	6.0				0.5			
Maximum Thermal Resistance (Note 3)	$R_{\theta JA}$	100								$^\circ\text{C/W}$
	$R_{\theta JL}$	45								
Operating Temperature Range	T_J	-55 to +150								$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55 to + 150								$^\circ\text{C}$

- Notes:
1. Pulse Test with PW=300 usec, 1% Duty Cycle.
 2. 12LYM: 1-1A, 2-20V, L-Low Profile, Y-Year Code, M-Month Code.
 3. Measured on P.C.Board with 0.2" x 0.2" (5.0mm x 5.0mm) Copper Pad Areas.

RATINGS AND CHARACTERISTIC CURVES

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

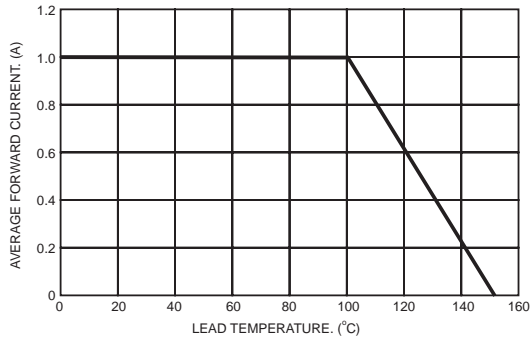


FIG.2- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

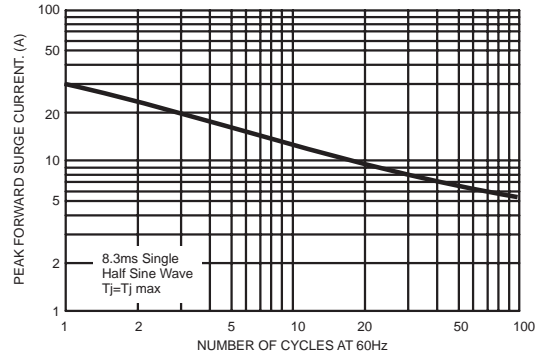


FIG.3- TYPICAL FORWARD CHARACTERISTICS

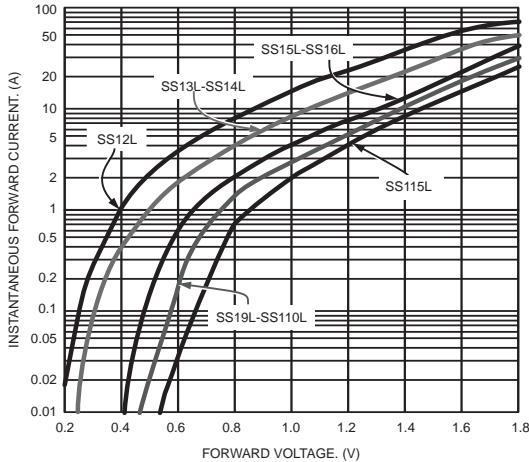


FIG.4- TYPICAL REVERSE CHARACTERISTICS

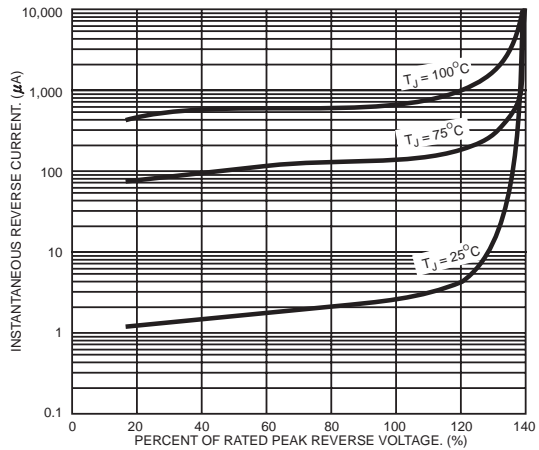


FIG.5- TYPICAL JUNCTION CAPACITANCE


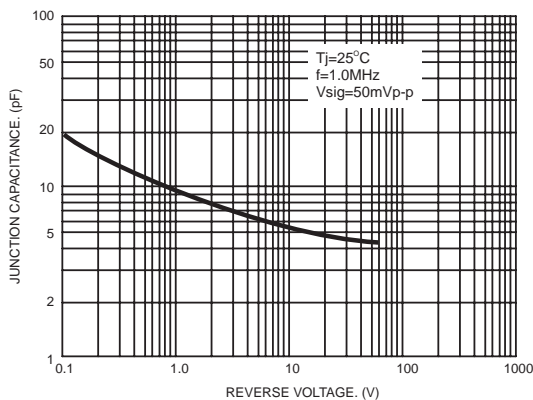


FIG.6- TYPICAL TRANSIENT THERMAL CHARACTERISTICS

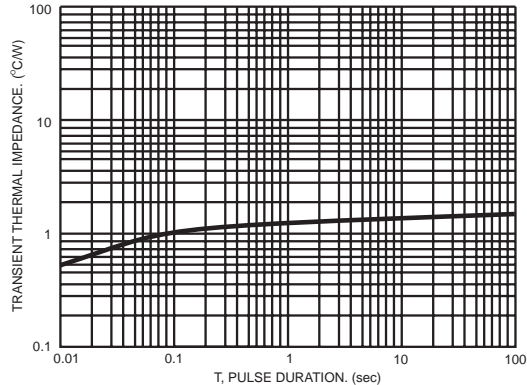

Information furnished by Silicon Standard Corporation is believed to be accurate and reliable. However, Silicon Standard Corporation makes no guarantee or warranty, expressed or implied, as to the reliability, accuracy, timeliness or completeness of such information and assumes no responsibility for its use, or for infringement of any patent or other intellectual property rights of third parties that may result from its use. Silicon Standard reserves the right to make changes as it deems necessary to any products described herein for any reason, including without limitation enhancement in reliability, functionality or design. No license is granted, whether expressly or by implication, in relation to the use of any products described herein or to the use of any information provided herein, under any patent or other intellectual property rights of Silicon Standard Corporation or any third parties.