





DESCRIPTION

MECHANICAL DIMENSION

FGF2001~07



**ITO-220AC**

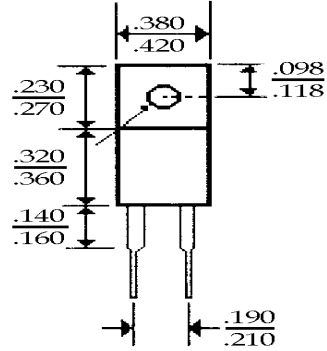

(Dimensions in inches)

FEATURES

- High surge Current Capability
- High Forward Current Capability
- Low Forward Voltage Drop
- Glass Passivated Chip Junction
- High Temperature Soldering Guaranteed

MECHANICAL DATA

- Case: JEDEC ITO-220AC Molded
- Plastic Body
- Terminals: Plated Leads Solderable per MIL-STD\_750, Method 2026
- Plastic package : Flammability Classification 94V-0

Maximum Ratings And Electrical Characteristics (Ta=25 )

Parameters	Symbol	FGF20						
		01	02	03	04	05	06	07
Average forward current, I <sub>o</sub> at T <sub>c</sub> =100 60Hz, Resistive or Inductive Load	IF	<b>20A</b>						
Peak Repetitive Reverse Voltage	VRRM	50	100	200	400	600	800	1000
Max RMS Voltage	V RMS	35	70	140	280	420	560	700
DC Blanking Voltage	VDC	50	100	200	400	600	800	1000
Forward Voltage @IF= 20A	VF	1.25V						
Non-Peak Forward Surge Current, @Rated Load Conditions 8.3mS 1/2 Sine-Wave	IFMS	200A						
Max. Reverse Current IR At Rated DC Reverse Voltage. T <sub>c</sub> =25/100	IR	5.0mA 50mA						
Typical thermal Resistance,	R <sub>JC</sub>	1.5 /W						
Typical Junction Capacitance (Note:1)	C <sub>j</sub>	100pF						
Operating and Storage Temperature Range	To/Ts	-65 to +150 /-65 to +175						

NOTE: 1. MEASURED AT 1 MHZ AND A APPLIED REVERSE VOLTAGE OF 4.0VD.C.

