





# ZF-1072D-10

The ZF-1072D -10 is designed to operate in a military environment. It specifically designed to help meet the conducted emissions requirements of MIL-STD-461D,E or F.

Other connectors can be fitted to the filter as well as different lead lengths to meet a customer's requirement.

The engineering department at JMK will be happy to help.

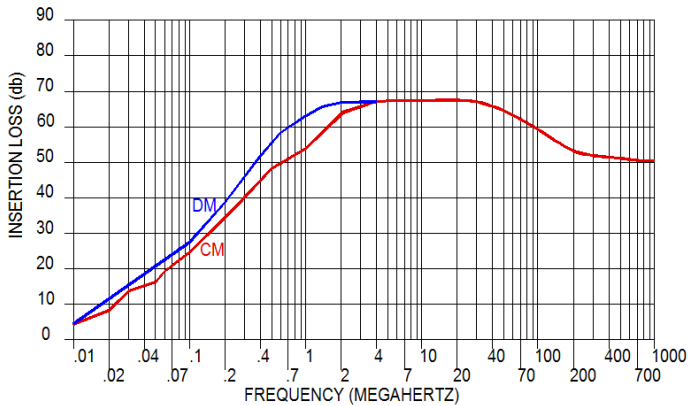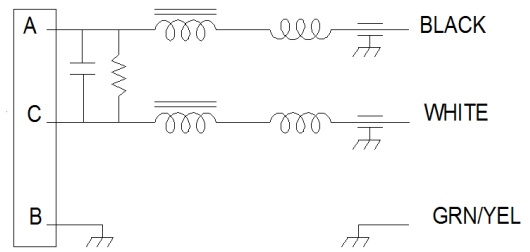

Operating Voltage= 125/250 Vac  
 Operating Current Max= 10A  
 Operating Frequency= DC—400 Hz  
 Temperature Operating= -40 TO 65°C  
 Die Withstand (Line to Case)= 1500VAC for 1 Min  
 Die Withstand (Line to Line)= 1500Vdc for 1min  
 Leakage Current = 1.0 ma @ 250 VAC, 60Hz  
 Discharge after 2.0 sec.= 25 V

